

FEATURES

- 365nm UVA response
- Visible & NIR blind
- Photovoltaic operation
- High shunt resistance

DESCRIPTION

The **PDU-G101A** is a GaN UV photodiode with a spectral range from 200nm to 365nm and is ideal for UVA sensing applications available in a TO-46 can package.

APPLICATIONS


- UVA power meters
- Sun dosimeters
- Flame detectors
- UV instrumentation

ABSOLUTE MAXIMUM RATING (TA)= 23°C UNLESS OTHERWISE NOTED

SYMBOL	PARAMETER	MIN	MAX	UNITS
V _{BR}	Reverse Voltage		5	V
T _{STG}	Storage Temperature	-40	+90	°C
T _O	Operating Temperature	-30	+85	°C
T _S	Soldering Temperature*		+260	°C

* 1/16 inch from case for 3 seconds max.

SPECTRAL RESPONSE

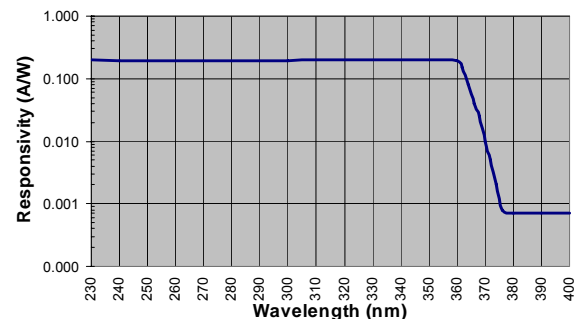

ELECTRO-OPTICAL CHARACTERISTICS RATING (TA)= 23°C UNLESS OTHERWISE NOTED

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{SC}	Short Circuit Current	UVI = 1		1		nA
I _D	Dark Current	V _R = 1V		50	100	μA
R _{SH}	Shunt Resistance	V _R = 10 mV	0.45	1		GΩ
C _J	Junction Capacitance	V _R = 0V, f = 1 MHz		24		pF
λ range	Spectral Application Range	Spot Scan	200		365	nm
R	Responsivity	λ = 350nm V, V _R = 0 V		0.10		A/W
V _{BR}	Breakdown Voltage	I = 1 μA		10		V
NEP	Noise Equivalent Power	V _R = 10V @ λ = Peak		1X10 ⁻¹³		W/√Hz
t _r	Response Time**	RL = 1KΩ, V _R = 1V		10	15	nS

**Response time of 10% to 90% is specified at 660nm wavelength light.

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.